


# Construction of a Mosaic from an Underwater Video with guaranteed data associations

M. Laranjeira, L. Jaulin, S. Tauvry, and C. Aubry  
Journée MRIS 2016 à l'ENSTA-Paris



Loop detection problem  
Brouwer fixed point theorem  
Interval analysis  
Test-case

A video of the presentation is available at

<http://youtu.be/sPKOBunIBEM>

**Objective:** Perform a localization in an unknown environment without building a map.

# Loop detection problem

**Example.** We are driving a car in the desert. We measure the speed of the car and its orientation. We have no GPS, no camera.  
**Problem.** Count the number of loops we made.

# Loop detection problem

## Brouwer fixed point theorem

### Interval analysis

### Test-case



**Robot:** We consider a state equation

$$\begin{cases} \dot{\mathbf{x}} &= \mathbf{f}(\mathbf{x}, \mathbf{u}) \\ \mathbf{y} &= \mathbf{g}(\mathbf{x}) \end{cases}$$

$\mathbf{u}$ : proprioceptive sensors


$\mathbf{y}$ : exteroceptive sensors

**Problem:** detect loops with proprioceptive (reliable) and exteroceptive (unreliable) sensors.



Loop detection problem  
Brouwer fixed point theorem  
Interval analysis  
Test-case

t-plane


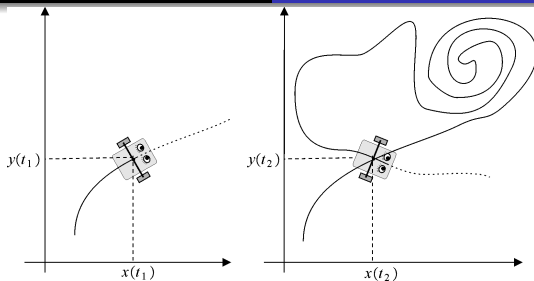




Define the shift function

$$\mathbf{f}(t_1, t_2) = \int_{t_1}^{t_2} \mathbf{v}(\tau) d\tau.$$

The loop set is


$$\mathbb{T} = \{(t_1, t_2) \in [0, t_{\max}]^2 \mid \mathbf{f}(t_1, t_2) = \mathbf{0}, t_2 > t_1\}$$






Loop detection problem  
Brouwer fixed point theorem  
Interval analysis  
Test-case

# Reliability in perception

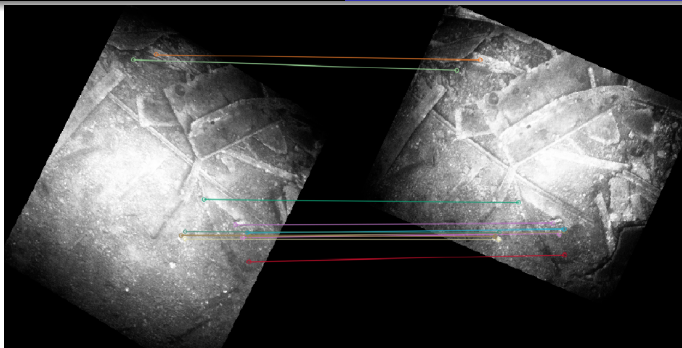

Are you sure we made a loop ?

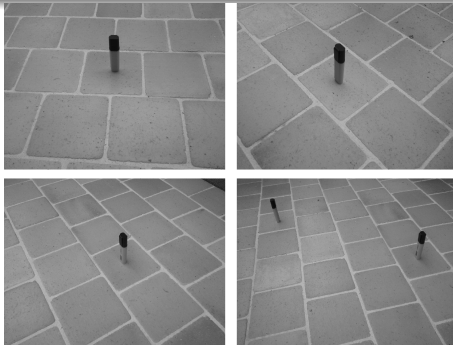




Find 10  
differences



# Brouwer fixed point theorem

**Brouwer fixed point theorem (1909).** Any continuous function  $n$  from bounded convex subset of  $\mathbb{R}^n$  to itself has a fixed point; i.e., a point such that  $n(x) = x$ .

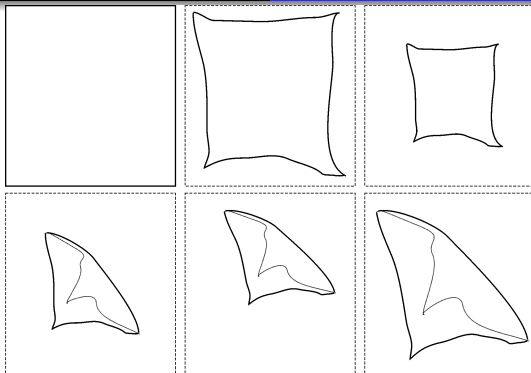

Distortion; narrowing; folding; shifting; enlargement : at least one point has not moved

**Example.** If

$$\mathbf{n}(t_1, t_2) = \begin{pmatrix} \cos(t_1 - t_2^2) \\ \sin(t_1 t_2) \end{pmatrix}$$

Since

$$\mathbf{n}([-1, 1], [-1, 1]) \subset [-1, 1] \times [-1, 1]$$



we conclude

$$\exists (t_1, t_2) \in [-1, 1]^2 \mid \mathbf{n}(t_1, t_2) = (t_1, t_2).$$

If we have a function  $n$  such that

$$n(x) = x \Rightarrow f(x) = 0,$$

then using Brouwer theorem we can detect loops.



# Interval analysis



**Problem.** Given  $f : \mathbb{R}^n \rightarrow \mathbb{R}$  and a box  $[\mathbf{x}] \subset \mathbb{R}^n$ , prove that

$$\forall \mathbf{x} \in [\mathbf{x}], f(\mathbf{x}) \geq 0.$$

**Example.** Is the function

$$f(\mathbf{x}) = x_1 x_2 - (x_1 + x_2) \cos x_2 + \sin x_1 \cdot \sin x_2 + 2$$

always positive for  $x_1, x_2 \in [-1, 1]$  ?

## Interval arithmetic

$$\begin{aligned}[-1, 3] + [2, 5] &= [1, 8] \\[-1, 3] \cdot [2, 5] &= [-5, 15] \\ \sin([0, 2]) &= [0, 1]\end{aligned}$$

The interval extension of

$$\begin{aligned}
 f(x_1, x_2) = & x_1 \cdot x_2 - (x_1 + x_2) \cdot \cos x_2 \\
 & + \sin x_1 \cdot \sin x_2 + 2
 \end{aligned}$$

is

$$\begin{aligned}
 [f]([x_1], [x_2]) = & [x_1] \cdot [x_2] - ([x_1] + [x_2]) \cdot \cos [x_2] \\
 & + \sin [x_1] \cdot \sin [x_2] + 2.
 \end{aligned}$$

## Theorem (Moore, 1970)

$$[f]([x]) \subset \mathbb{R}^+ \Rightarrow \forall x \in [x], f(x) \geq 0$$

## Theorem (Moore-Brouwer)

For  $f : \mathbb{R}^n \rightarrow \mathbb{R}^n$ , we have

$$[f]([x]) \subset [x] \Rightarrow \exists x \in [x], f(x) = x.$$

# Bracketting sets

Subsets  $\mathbb{X} \subset \mathbb{R}^n$  can be bracketed by subpavings :


$$\mathbb{X}^- \subset \mathbb{X} \subset \mathbb{X}^+.$$

which can be obtained using interval calculus




## Example.


$$\mathbb{X} = \{\mathbf{x} \mid x_1 x_2 - (x_1 + x_2) \cos x_2 + \sin x_1 \cdot \sin x_2 + 2 \geq 0\}.$$

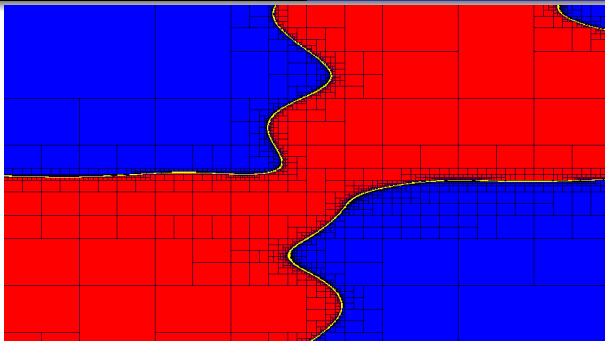

# Test-case

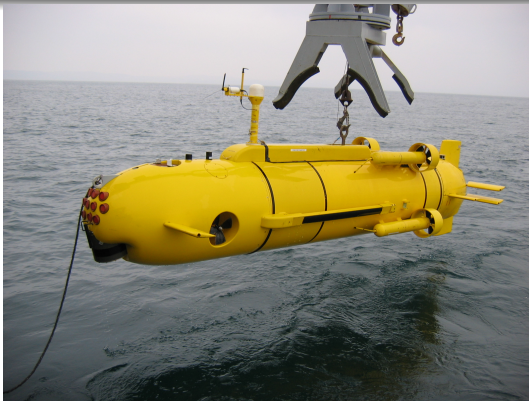

*Redermor*, DGA-TN

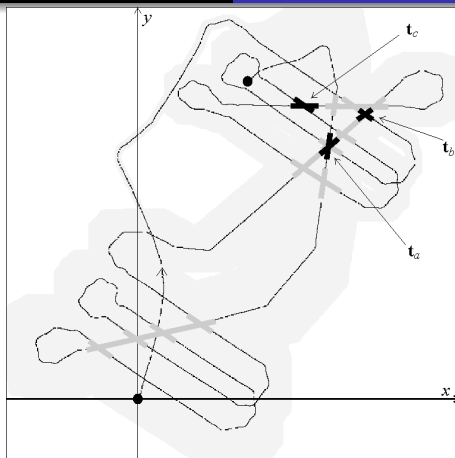

# Loop set defined as inequalities


The robot knows a box  $[\mathbf{v}](t)$  for  $\mathbf{v}(t)$ . We have

$$\mathbb{T} = \left\{ (t_1, t_2) \in [0, t_{\max}]^2 \mid \exists \mathbf{v} \in [\mathbf{v}], \int_{t_1}^{t_2} \mathbf{v}(\tau) d\tau = \mathbf{0}, t_1 < t_2 \right\}$$

Thus  $\mathbb{T}$  is defined by



$$\mathbf{h}(t_1, t_2) = \begin{pmatrix} \int_{t_1}^{t_2} \mathbf{v}^-(\tau) d\tau \\ -\int_{t_1}^{t_2} \mathbf{v}^+(\tau) d\tau \\ t_1 - t_2 \end{pmatrix} < \mathbf{0}.$$




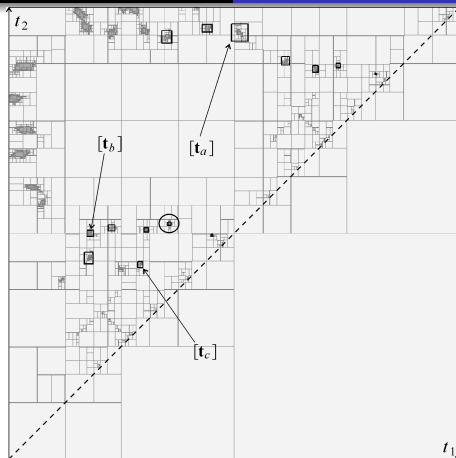



Loop detection problem  
Brouwer fixed point theorem  
Interval analysis  
**Test-case**

# Mosaic

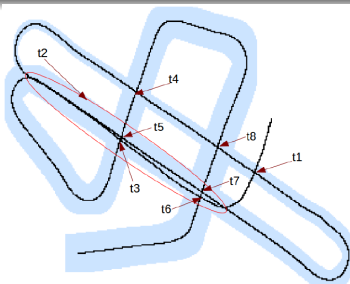


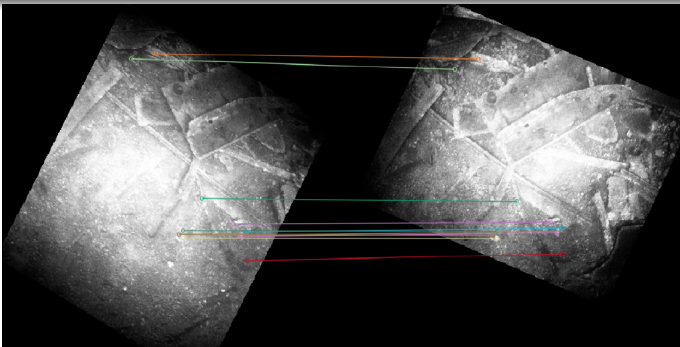

Compatible or incompatible ?

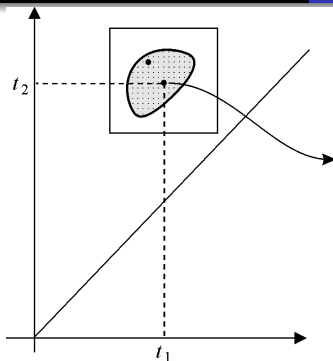



# Contract the tube

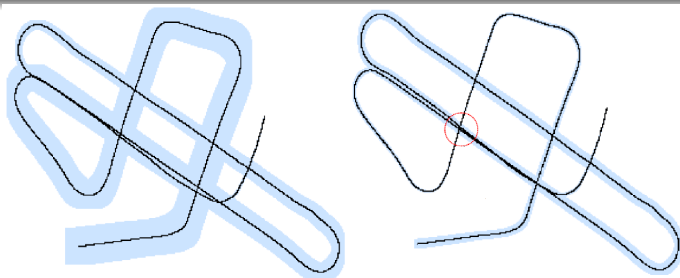


# Projection




- Loop detection problem
- Brouwer fixed point theorem
- Interval analysis
- Test-case**

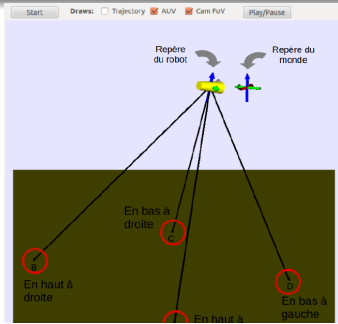

# Illumination equalization

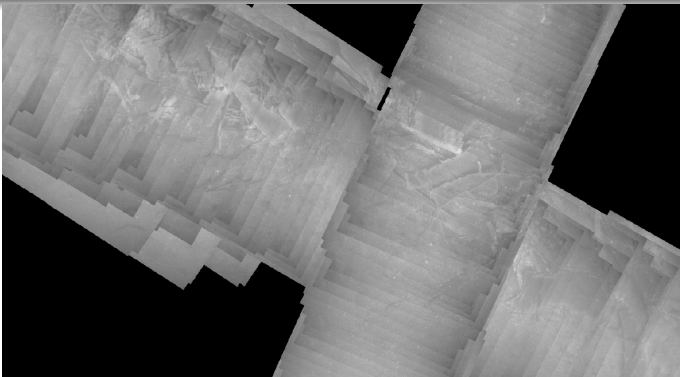

Before illumination equalization

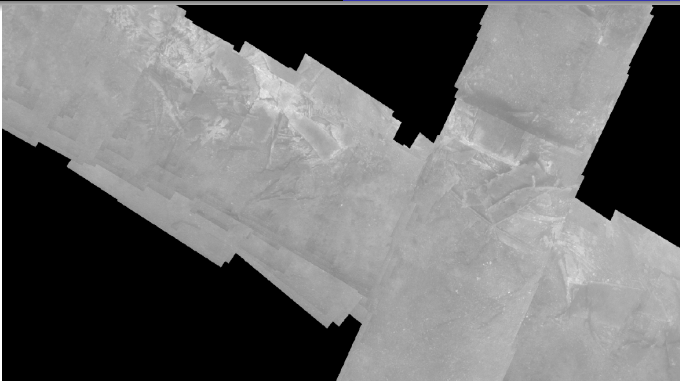

After illumination equalization

<https://youtu.be/5MwRN8Yd61c>